

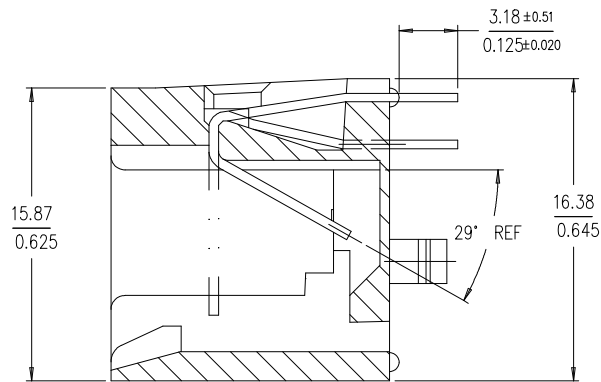
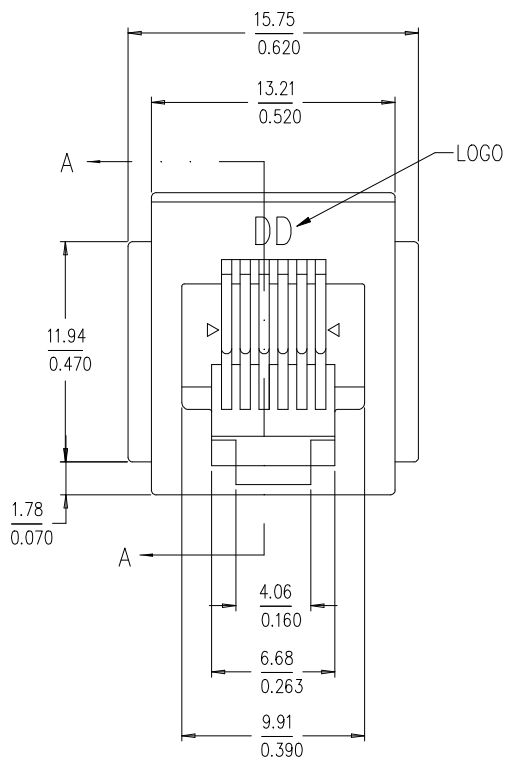


PRODUCT NO.  
SEE TABLE

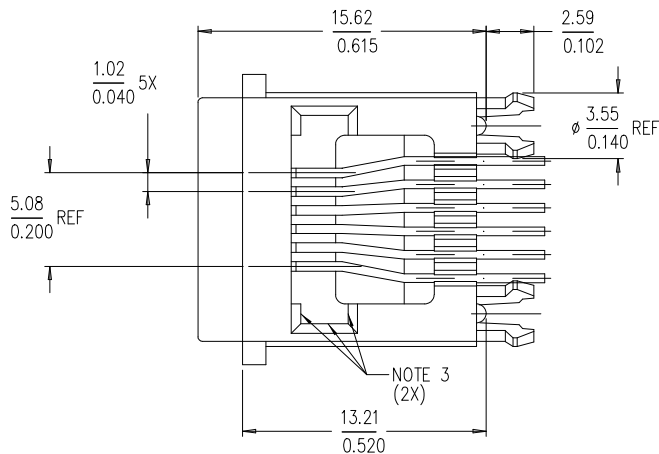

SECTION A-A

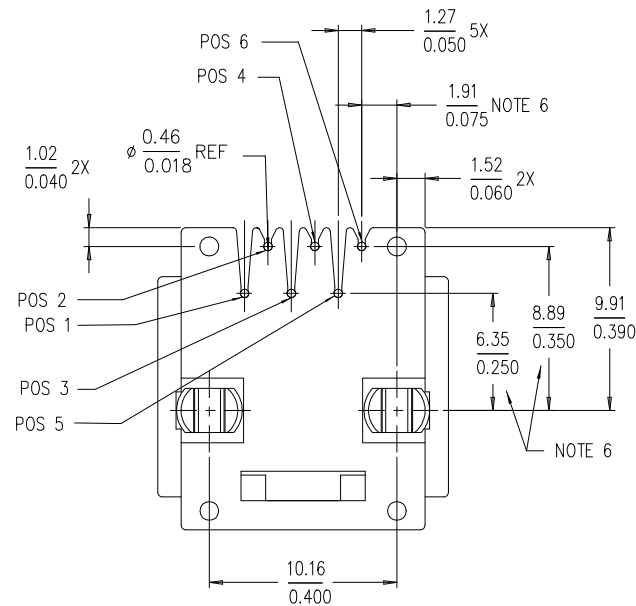



mat'l. code				surface <input checked="" type="checkbox"/> ISO 1302 <input type="checkbox"/> tolerance <input checked="" type="checkbox"/> ISO 406/ISO 1101		projection		product family	
ltr ecn no dr date				tolerances unless otherwise specified		mm		title	
N	N04-0102	YS	11/23/04	.X±0.3				MJ	
P	N08-0097	SH	09/25/08	.XX±0.15				6 POS VERT. SNAP PEG	
R	N08-0170	SH	10/10/08	0° ± 2'				PCB III MOD JACK ASSY	
S	ELX-N-010713	SH MIAO	3/14/12	dr	M CHENG	7/13/01	scale 1:1		dwg no sheet 1 of 2 size
T	ELX-N-39607	DW	1/13/2021	eng	M CHENG	7/13/01	Amphenol FCI		
				chr	M CHENG	7/18/01	90512		A4
				appd	J HSIA	7/20/01	type Product Customer Drawing		
sheet index	revision sheet	T	1~2						

PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	NOTES
90512-001 -001LF -011LF	ALL	5u" Au + high performance lubricant	BLACK
-002 -002LF -012LF	ALL	5u" Au + high performance lubricant	BLACK
-003 -003LF -013LF	2,3,4,5	5u" Au + high performance lubricant	BLACK
-004 -004LF -014LF	2,3,4,5	50u" / 1.27u GXT	BLACK
-005 -005LF -015LF	3,4	5u" Au + high performance lubricant	BLACK
-006 -006LF	ALL	5u" Au + high performance lubricant	GREY
-007 -007LF	ALL	5u" Au + high performance lubricant	GREY
-008 -008LF	3,4	5u" Au + high performance lubricant	GREY

PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	REMARKS
90512-101 -101LF -111LF	ALL	5u" Au + high performance lubricant	NOT TOOLED
-102 -102LF -112LF	ALL	5u" Au + high performance lubricant	NOT TOOLED
-103 -103LF -113LF	2,3,4,5	5u" Au + high performance lubricant	NOT TOOLED
-104 -104LF -114LF	2,3,4,5	50u" / 1.27u GXT	NOT TOOLED
-105 -105LF -115LF	3,4	5u" Au + high performance lubricant	NOT TOOLED

LEAD FREE PRODUCT NO.

0: MEETS WAVE SOLDER PROCESS PRODUCT NO.  
1: MEETS PIP PROCESS PRODUCT NO.

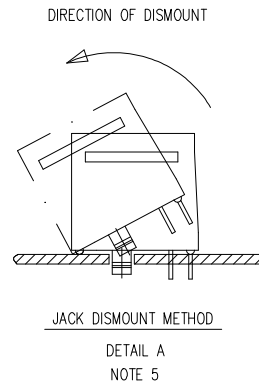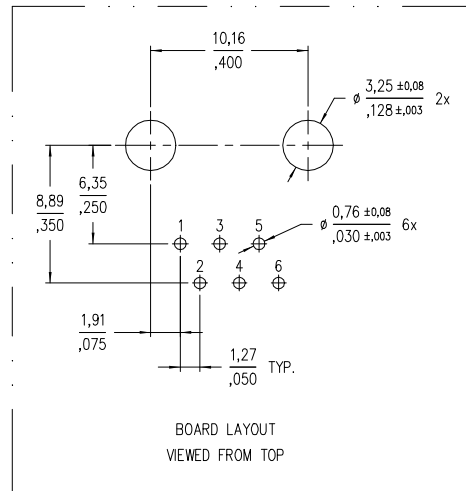

NOTES :

- P/NO WITH DASH 0XX -NORMAL WAVE SOLDERING APPLICATION.  
P/NO WITH DASH 1XX -1R REFLOW APPLICATION (NOT TOOLED).
- PACKAGING SPEC. BUS-14-164.
- SCRATCH MARKS ACCEPTABLE ON THESE SURFACES.
- JACK IS FOR 1,57/.062 THICK PCB.
- SHOULD THE JACK NEED TO BE DISMOUNTED FROM THE PCB, PLS REMOVE JACK AS PER RECOMMENDED METHOD HEREIN. (DETAIL A) NIPPING THE LEGS OF THE PEG TOGETHER IS DISALLOWED, OTHERWISE LEG BREAKAGE MAY OCCUR.
- THESE DIMENSIONS ARE TAKEN FROM THE TOP OF THE PEG.
- THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
- IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.
- EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOMER.

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406/ISO 1101		MJ
ltr	ecn no	dr	date	title	
T				6 POS VERT. SNAP PEG	
tolerances unless otherwise specified				mm	PCB III MOD JACK ASSY
angles				scale 1:1	sheet 2 of 2
dr				M CHENG	7/13/01
engr				M CHENG	7/13/01
chr				M CHENG	7/18/01
appd				J HSIA	7/20/01
sheet index		revision	T	type Product Customer Drawing	
		sheet	1~2		